
F3 BASIC FLOOR CABINET 19"

F3 8820-S-4PR



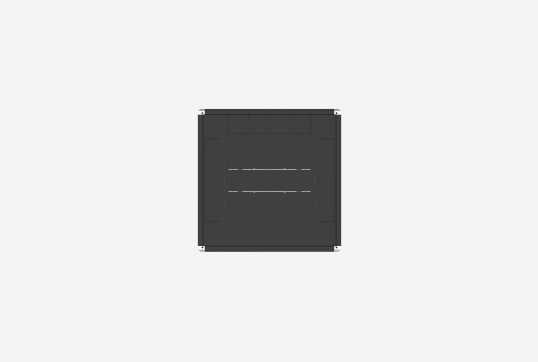

F3 BASIC FLOOR CABINET 19"

F3 8820-S-4PR

NAMN	**F3 8820-S-4PR**	PRODUKT EAN	**7330701104695**
ART. NR	**57570**	TULL TARIFKOD	**94032080**
ENUMMER	**2503670**		
BREDD	**800 MM**		
DJUP	**800 MM**		
HÖJD	**2000 MM**		
FÄRG	**BLACK**		
URSPRUNGSLAND	**SWEDEN**		

Teknisk information och certifikat

- Screw assembled frame with aluminium profiles, steel sheet profiles and die-cast zinc corners. The frame has two integrated vertical screw pockets in each corner profile for universal mounting of accessories.

- F3 contains one pair of 19" profiles (600 and 800 mm deep) or two pairs of 19" profiles (1000 mm deep). One pair is preinstalled at a depth of 100 mm from the front of the enclosure and the other pair is pre-installed 740 mm further in.
- M10 thread in each corner both in the bottom and top for accessory fixing.
- Central grounding point M5 in the corner post.
- Surface treatment, textured black RAL 9005. Other colours on request.
- Ingress protection class IP20.
- Maximum static load 800 kg, divided on 4 19" profiles.
- Front door is made of 4 mm clear safety glass glued into an aluminium profile left and right. LS 19 lock with C101 safety cylinder. LS 95 can be installed as accessory. Integrated quick lock system allows door to be removed without use of tools. Door opening angle >180 degrees in single enclosure configuration. Right hinged, can be re-hung to be left hinged.
- Available with ventilated doors and double doors.
- Back door is made of 1 mm sheet steel. LS 39 lock with C101 safety cylinder. LS 85 can be installed as accessory. Other similar to front door.
- Sheet steel side panels, easy to detach and one lock lockable from inside and one slotted lock. LS 29 with C101 safety cylinder available as accessory.
- Roof with cutout cable entrance in rear, left and right on depth 800 mm, only on rear on depth 600 mm. One cutout to fit FPME or VPE accessory. Brush list available as accessory.
- The 19" profiles can be steplessly repositioned through the depth of the enclosure. The depth profiles have markings for precise positioning of the 19" profiles. The 19" profiles are numbered in height units.