




FO1 IT FRAME 19"

Fo1 61018-S

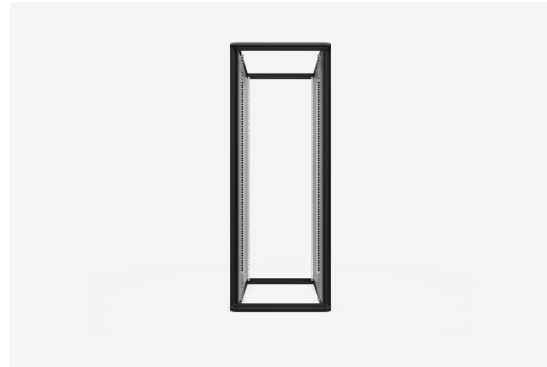

**FO1 IT FRAME 19"****Fo1 61018-S**

NAMN	<b>FO1 61018-S</b>	PRODUKT EAN	<b>7330701087639</b>
ART. NR	<b>56114</b>	ETIM	<b>EC002499</b>
ENUMMER	<b>2500664</b>	TULL TARIFKOD	<b>94032080</b>
BREDD	<b>600 MM</b>		
DJUP	<b>1000 MM</b>		
HÖJD	<b>1800 MM</b>		
FÄRG	<b>BLACK</b>		
URSPRUNGLAND	<b>SWEDEN</b>		

**Teknisk information och certifikat**

- Screw-assembled frame with aluminium profiles and die-cast zinc corners. The frame has two integrated vertical screw pockets in each corner profile for universal mounting of accessories.



- Frame can be dismantled by means of screws.
- Surface treatment: black RAL 9005.
- Ingress protection class IP20.
- Maximum static load 1,500 kg, and divided on 4 19" profiles
- Frame has no doors or side panels. Can be supplemented with door and side panels from our range of accessories.
- Frame without top panels. Can be supplemented with top panels from our range of accessories.
- The base is open, but can be fitted with cover plate/ base plate packages.
- The 19" profiles can be steplessly repositioned through the depth of the enclosure. The depth profiles have markings for precise positioning. The 19" profiles are numbered in height units.  
The whole assembly can be moved right or left to an off-centre position.

## Leveransbeskrivning

---

Assembled with 2 19" profiles

Central grounding Point M5 in the corner post.