W3 WALL ENCLOSURE

W3 6-5-S

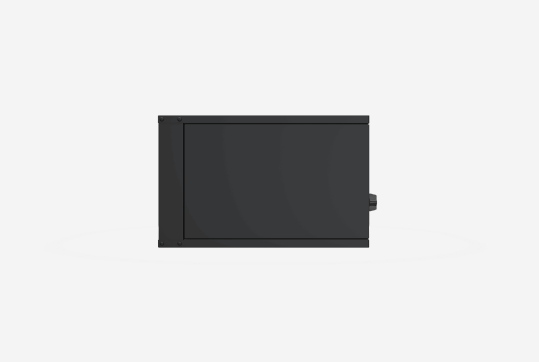

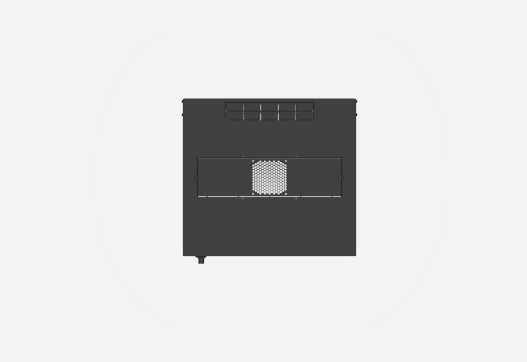

W3 WALL ENCLOSURE

W3 6-5-S

NAMN	**W3 6-5-S**	PRODUKT EAN	**7330701103407**
ART. NR	**57441**	ETIM	**EC002500**
ENUMMER	**2500860**	TULL TARIFKOD	**94032080**
BREDD	**550 MM**		
DJUP	**500 MM**		
HÖJD	**314 MM**		
FÄRG	**BLACK**		
URSPRUNGSLAND	**SWEDEN**		

Teknisk information och certifikat

- Made of bent sheet steel.
- Surface treatment, textured black RAL 9005.

- Door of Glass, metal or ventilated metal. Glass door is made of safety glass, metal and ventilated metal door is made of sheet steel.
- Door opening angle 110°.
- Right-hinged, can be re-hung to be left-hinged.
- Sheet steel sides, detachable.
- Top and bottom plates have knock-outs for cable glands. Supplied with edging strip for cable protection.
- Passive ventilation in top and bottom.
- 19″ hole pattern in rear uprights for mounting accessories.
- One pair of 19-inch profiles (482.6 mm) pre-fitted 80 mm in from the enclosure front, can be repositioned at 25 mm intervals through depth of the enclosure.
- Extra pair of 19″ profiles available as accessory.
- Keyholes for wall mounting.
- Open back, the back panel as accessory.
- Maximum static load 40 kg.
- Ingress protection class IP 20.
- Other RAL colours on request.